

51776 U.S. PTO  
05/19/97

Attorney Docket No.: QCPA418  
Date: May 19, 1997

66474 U.S. PTO  
08/858245  
05/19/97

Commissioner of Patents and Trademarks  
Washington, D.C. 20231

Dear Sir:

Transmitted herewith for filing is the patent application of  
Inventor(s): ROBERTO PADOVANI

For: METHOD AND APPARATUS FOR OPTIMIZATION OF A CELLULAR NETWORK

Enclosed are:


- ☒ Five (5) sheets of informal drawings (one copy).  
☐ An Assignment of the invention to QUALCOMM Incorporated  
☒ Unsigned Declaration/Power of Attorney.  
☐ Verified Statement to establish small entity status under 37 CFR § 1.9 and 37 CFR § 1.27.  
☐ Other:

The filing fee has been calculated as shown below:

a		b		Small Entity		Large Entity	
CLAIMS:	Filed	Extra*	Rate	Fee Basic Fee \$365	Rate	Fee Basic Fee \$770.00	
Total	1	0	x \$11 =		x \$22 =	\$0.00	
Independent	1	0	x \$40 =		x \$80 =	\$0.00	
Multiple Dependent Claim(s):		NONE	\$130		\$260	\$0.00	
			TOTAL FEE		TOTAL FEE	\$770.00	

\* If the difference in Column "a" is less than zero, enter "0" under Column "b".

- ☐ A check in the amount of \$ \_\_\_ is enclosed to pay the filing fee.  
☒ Please charge Deposit Account No. 17 - 0026 of QUALCOMM Incorporated in the amount of \$770.00.  
The Commissioner is hereby authorized to charge payment of any additional fees which may be required, or credit any overpayment, to said Deposit Account No. 17 - 0026. A duplicate of this sheet is enclosed.  
☒ The Commissioner is further hereby authorized to charge to said Deposit Account No. 17 - 0026, pursuant to 37 CFR 1.25(b), any fee whatsoever which may become properly due or payable, as set forth in 37 CFR 1.16 to 37 CFR 1.18 inclusive, for the entire pendency of this application without specific additional authorization.

  
Sean English  
Registration No. 37,319

QUALCOMM Incorporated  
6455 Lusk Boulevard  
San Diego, California 92121  
Telephone: (619) 658-4828  
Facsimile: (619) 658-2502

[QCPA418T/L]

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re Application of ) For: METHOD AND APPARATUS FOR  
ROBERTO PADOVANI ) OPTIMIZATION OF A CELLULAR  
Serial No. UNKNOWN ) NETWORK  
Filed: MAY 19, 1997 ) Group Art Unit: Unknown



CERTIFICATE OF MAILING UNDER 37 CFR § 1.10

Asst. Commissioner of Patents  
BOX PATENT APPLICATIONS  
Washington, D.C. 20231

Dear Sir:

"Express Mail" mailing label No. EI052716989US  
Date of Deposit May 19, 1997

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR § 1.10 on the date indicated above and is addressed to the Asst. Commissioner of Patents, Box Patent Applications, Washington, D.C. 20231.

Danielle L. Miller

(Name)

Danielle L. Miller

(Signature)

QUALCOMM Incorporated  
6455 Lusk Boulevard  
San Diego, California 92121  
Telephone: (619) 658-4828  
Facsimile: (619) 658-2502

# METHOD AND APPARATUS FOR OPTIMIZATION OF A CELLULAR NETWORK

## BACKGROUND OF THE INVENTION

5

### I. Field of the Invention

The present invention relates to communications. More particularly,  
the present invention relates to a novel and improved method and  
10 apparatus for optimizing a cellular network using empirical data received by  
base stations.

### II. Description of the Related Art

15 Currently, cellular systems are designed using simulation design tools  
such as those described in U.S. Patent Application Serial No. 08/515,772,  
entitled "INTERACTIVE GRAPHICAL TOOLS FOR CELLULAR SYSTEM  
DESIGN", filed August 16, 1995, and in U.S. Patent Application Serial No.  
08/535,999, entitled "CDMA NETWORK PERFORMANCE ANALYSIS  
20 TOOL", filed September 29, 1995, both of which are assigned to the assignee  
of the present invention and are incorporated by reference herein. The data  
provided by these simulations is limited by the amount of information  
regarding the terrain and propagation path characteristics that are provided  
to the simulation.

25 The aforementioned Patent Application Serial No. 08/535,999  
describes in detail a method and apparatus for planning a code division  
multiple access wireless telecommunications network. An electronic  
representation of wireless telecommunications system can be configured  
within a given market area and the operation of that wireless  
30 telecommunications system simulated. The simulation is performed using  
a set of databases that contain terrain and population information associated  
with the market area over which the wireless network is configured. To  
perform the simulation a composite propagation loss matrix and a demand  
and service vector are generated using the terrain and population  
35 information. Once the propagation loss matrix and the demand and service  
vector are generated an analysis of the reverse link is performed.  
Subsequently, an analysis of the forward link is performed. During both the  
reverse and forward link analysis the multiple iterations of analysis are  
performed until a stable result is achieved. Upon completion of the reverse

and forward link analysis, the results of the simulation are displayed in a graphical manner for examination.

The aforementioned Patent Application Serial No. 08/515,772 describes in detail a method and apparatus for providing network planning information in an interactive manner. A user selects a planning tool and inputs a selection point. If a line of sight cursor tool has been selected, a set of points on a display are set indicating a line of sight exists from those points to the selected point. If a path loss cursor tool has been selected a set of points on a display are set indicating that path loss to the selection point is less than a certain threshold. Alternatively, a set of point on the display are set to various colors or shades indicating a range of path loss amounts to the selected point. In the preferred embodiment the invention incorporates the use of a computer system.

A second step that is frequently used to determine network parameters is to perform "dry runs" on the equipment by sending test mobile stations into the field. However, these tests are generally very time consuming and limited to generally a small set of predefined locations. On the other hand, during commercial operation users which access the network freely from any location within the coverage provide important and useful information to the network operator via the PSMM's.

The use of code division multiple access (CDMA) modulation techniques is but one of several techniques for facilitating communications in which a large number of system users are present. Although other techniques, such as time division multiple access (TDMA), frequency division multiple access (FDMA) and AM modulation schemes such as amplitude companded single sideband (ACSSB) are known, CDMA has significant advantages over these other modulation techniques. The use of CDMA techniques in a multiple access communication system is disclosed in U.S. Patent No. 4,901,307, entitled "SPREAD SPECTRUM MULTIPLE ACCESS COMMUNICATION SYSTEM USING SATELLITE OR TERRESTRIAL REPEATERS" and U.S. Patent No. 5,103,459, entitled "SYSTEM AND METHOD FOR GENERATING SIGNAL WAVEFORMS IN A CDMA CELLULAR TELEPHONE SYSTEM", both of which are assigned to the assignee of the present invention and are incorporated by reference. The method for providing CDMA mobile communications was standardized by the Telecommunications Industry Association in TIA/EIA/IS-95-A entitled "Mobile Station-Base Station Compatibility Standard for Dual-Mode Wideband Spread Spectrum Cellular System" (hereafter IS-95).

In the just mentioned patents, a multiple access technique is disclosed in which a large number of mobile telephone users, each having a transceiver, communicate through satellite repeaters or terrestrial base stations (also known as cell base stations or cell-sites) using code division  
5 multiple access (CDMA) spread spectrum communication signals. In using CDMA communications, the frequency spectrum can be reused multiple times thus permitting an increase in system user capacity. The use of CDMA techniques results in much higher spectral efficiency than can be achieved using other multiple access techniques.

10 A method for simultaneously demodulating data that has traveled along different propagation paths from one base station and for simultaneously demodulating data redundantly provided from more than one base station is disclosed in U.S. Patent No. 5,109,390 (the '390 patent), entitled "DIVERSITY RECEIVER IN A CDMA CELLULAR  
15 COMMUNICATION SYSTEM", assigned to the assignee of the present invention and incorporated by reference herein. In the '390 patent, the separately demodulated signals are combined to provide an estimate of the transmitted data which has higher reliability than the data demodulated by any one path or from any one base station.

20 Handoffs can generally be divided into two categories- hard handoffs and soft handoffs. In a hard handoff, when a mobile station leaves and origination cell and enters a destination cell, the mobile station breaks its communication link with the origination cell and thereafter establishes a new communication link with the destination cell. In soft handoff, the  
25 mobile station completes a communication link with the destination cell prior to breaking its communication link with the origination cell. Thus, in soft handoff, the mobile station is redundantly in communication with both the origination cell and the destination cell for some period of time.

Soft handoffs are far less likely to drop calls than hard handoffs. In  
30 addition, when a mobile station travels near a cell boundary, it may make repeated handoff requests in response to small changes in the environment. This problem, referred to as ping-ponging, is also greatly lessened by soft handoff. The process for performing soft handoff is described in detail in U.S. Pat. No. 5,101,501, entitled "METHOD AND SYSTEM FOR PROVIDING  
35 A SOFT HANDOFF IN COMMUNICATIONS IN A CDMA CELLULAR TELEPHONE SYSTEM" assigned to the assignee of the present invention and incorporated by reference herein.

An improved soft handoff technique is disclosed in U.S. Pat. No. 5,267,261 (the '261 patent), entitled "MOBILE STATION ASSISTED SOFT

HANDOFF IN A CDMA CELLULAR COMMUNICATIONS SYSTEM", which is assigned to the assignee of the present invention and incorporated by reference herein. In the system of the '261 patent, the soft handoff process is improved by measuring the strength of "pilot" signals transmitted by each  
5 base station within the system at the mobile station. These pilot strength measurements are of assistance in the soft handoff process by facilitating identification of base station handoff candidates capable of providing reliable communication with the mobile station.

The base station candidates can be divided into four sets. The first set,  
10 referred to as the Active Set, comprises base stations which are currently in communication with the mobile station. The second set, referred to as the Candidate Set, comprises base stations which have been determined to be of sufficient strength to provide reliable communications with the mobile station. Base stations are added to the candidate set when their measured  
15 pilot energy exceeds a predetermined threshold  $T_{ADD}$ . The third set, referred to as the Neighbor Set, is the set of base stations which are in the vicinity of the mobile station (and which are not included in the Active Set or the Candidate Set). And the fourth set is the Remaining Set which consists of all other base stations.

20 When a CDMA base station is configured, there are many parameters that can potentially vary. For example, each IS-95 base station transmits a neighbor list that identifies the base stations which are most likely to be able to communicate with a mobile station in the area. The members of the neighbor list may simply include the base stations that are most closely  
25 located to that base station and are frequently determined in accordance with simulation programs like those described above. However, it is possible that the cells that are able to provide reliable communications with the base station are not simply the base stations most closely located. Some base stations that are close to that base station may be blocked by obstructions.  
30 Conversely, some distant base stations may be able to provide communications to a mobile station within the coverage of the base station owing to clear propagation path. In addition, configuration of the base stations, including the tilt of the antenna, the azimuth angle of the sector antennas, the total transmit power of the base station and the physical  
35 location of the base station are all capable of changing to further optimize the network configuration.

In an IS-95 communication system, the mobile station sends a Pilot Strength Measurement Message when it finds a pilot of sufficient strength that is not associated with any the of the Forward Traffic Channels currently

being demodulated or when the strength of a pilot that is associated with one of the Forward Traffic Channels being demodulated drops below a threshold for a predetermined period of time. The mobile station sends a Pilot Strength Measurement Message following the detection of a change in the strength of a pilot under the following three conditions:

1. The strength of a Neighbor Set or Remaining Set pilot is found above the threshold  $T_{ADD}$ .
2. The strength of a Candidate Set pilot exceeds the strength of an Active Set pilot by more than a threshold ( $T_{COMP}$ ).
3. The strength of a pilot in the Active Set of Candidate Set has fallen below a threshold ( $T_{DROP}$ ) for greater than a predetermined time period.

The Pilot Strength Measurement Message identifies the base station and the measured pilot energy in decibels.

In current systems, the Pilot Strength Measurement Messages (PSMMs) are used to perform handoff operations and are then discarded by the system. However, there is valuable information contained in these messages that can be used to optimize a cellular network. Therefore, a need exists for a method and apparatus that uses the information contained in the transmitted PSMMs to assist in the optimization of network configuration in a cellular communication system. And to provide a method for configuring a cellular network based on true empirical data, as opposed to the limited accuracy of simulated data and data compiled in dry runs.

## SUMMARY OF THE INVENTION

The present invention is a novel and improved method and apparatus for optimizing system parameters in a cellular communication network. In the present invention, pilot strength measurement messages that base stations of the system to be optimized are saved in a database. The database accumulates the raw data contained in the pilot strength measurement messages. After a sufficient amount of data has been collected to provide a set of significant statistics, a report generator compiles a statistics report for each base station based on the raw data. In the exemplary embodiment, each base station's statistics report describes the maximum

strength, minimum strength and average strength reported for each base station reported in the collection of pilot strength measurement messages.

The report is then used to optimize the network parameters of the cellular system. In the present invention, the neighbor list which is transmitted on the paging or traffic channel is revised in accordance with the compiled statistics. In addition, the transmission characteristics of the base station are modified in accordance with the compiled statistics. In the exemplary embodiment, the antenna tilt of the base stations is adjusted in accordance with the compiled statistics. In alternative embodiments of the present invention, the total transmission power of the base stations, the base station location and the azimuth angle of the sectored antennas can be changed in accordance with the compiled statistics.

### BRIEF DESCRIPTION OF THE DRAWINGS

The features, objects, and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout and wherein:

FIG. 1 is an illustration of a cellular communication network;

FIG. 2 is an illustration of the cellular communication network of FIG. 1 which includes the base station controller;

FIG. 3 is a block diagram of the mobile station of the present invention;

FIG. 4 is a block diagram of the base station and base station controller of the present invention; and

FIG. 5 is an exemplary report of compiled statistics from pilot strength measurement messages.

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 illustrates a cellular communication network in which the geographical area has been divided up into coverage areas referred to as cells and illustrated by a set of adjacent hexagons. Each cell is served by a corresponding base station 4. Each base station 4 transmits a pilot signal which uniquely identifies that base station. In addition, each base station 4 transmits, on the paging channel or traffic channel, a neighbor list that identifies base stations most likely to be capable of providing communication with the mobile station. In the exemplary embodiment,



the base stations 4 are IS-95 code division multiple access (CDMA) base stations. The generation and contents of a the paging and traffic channels of the exemplary embodiment are described in detail in the IS-95 standard and are well known in the art. In the example of an IS-95 CDMA communication system, the base stations 4 are uniquely identified in accordance with a timing offset for the generation of the pseudonoise sequence used to modulate the transmitted data.

Mobile station 2 is located within the cell served by base station 4A. Since mobile station 2 is located near the cell boundary, it will likely be in a soft hand-off condition, in which it is simultaneously in communication with more than one base station. A detail description of soft hand-off in a wireless CDMA communication system is described in detail in the aforementioned U.S. Patent Nos. 5,101,501 and 5,267,261. It may, for example, be in communication with base stations 4A and 4B. Thus, base stations 4A and 4B are said to make up the active set. Moreover, it may be that mobile station 2 has determined other base stations in its vicinity to have a measured pilot energy above a predetermined threshold  $T_{ADD}$ , but those base stations are not currently in communication with the mobile station. Those pilots are said to make up the candidate set. The candidate set could be made up of base stations 4C and 4G.

The neighbor list of base stations comprise a third set of base stations and consist of the base stations identified on the paging or traffic channel of base station 4A. Initially, the base stations identified on the paging or traffic channel are determined in accordance with their physical proximity to base station 4A and based on simulation data. Initially, it may be desirable for base station 4A to transmit a large neighbor set of base stations consisting for example of base stations 4A-4S. As will be seen by the description of the operation of mobile station 2, this overly broad neighbor set may decrease the efficiency of the pilot search operation.

Referring to FIG. 2, a typical communication network is illustrated. Data directed mobile station 2 is provided from a public switched telephone network (PSTN) or other wireless system (not shown) to base station controller 6. Base station controller 6 provides the data to the base stations 4 in mobile station 2's active list.

The present invention is equally applicable to conditions where each cell is divided into sectors with each sector being capable of being separately identified. In the exemplary embodiment of an IS-95 wireless communication system, the sectors of a base station are identified uniquely by a timing offset in the pseudonoise (PN) generation sequence.

Communications to and from each sector can be separately received and demodulated by mobile station 2. For simplicity, the discussion will be described in terms of separate base stations 4. However, it will be readily seen by one skilled in the art that the present invention is equally extended to sectorized cells, simply by considering the possibility that the base stations are collocated and transmitting to separate sectors within a cell. The condition where a mobile station is in simultaneous communication with more than one sector of a cell is referred to as softer handoff. The method and apparatus for providing sectorized coverage and for performing softer hand-off are described in detail in copending U.S. Patent Application No. 08/144,903, entitled "METHOD AND APPARATUS FOR PERFORMING HANDOFF BETWEEN SECTORS OF A COMMON BASE STATION", filed October 30, 1993, which is assigned to the assignee of the present invention and incorporated by reference herein.

Within mobile station 2, each copy of the data packet is separately received, demodulated and decoded. The decoded data is then combined to give a estimate of the data of greater reliability than any one of demodulated estimates of the data. The apparatus for combining separately received an demodulated data to provide a estimate of greater reliability is described in detail in the aforementioned U.S. Patent No. 5,109,390.

FIG. 3 illustrates mobile station 2 for the exemplary embodiment of a CDMA mobile phone. Mobile station 2 continuously or at intermittent intervals measures the strength of pilot signals of base stations 4. Signals received by antenna 50 of mobile station 2 are provided through duplexer 52 to receiver (RCVR) 54 which amplifies downconverts and filters the received signal and provides the signal to pilot demodulator 58 of searcher subsystem 55.

In addition, the received signal is provided to traffic demodulators 64A-64N. Traffic demodulators 64A-64N, or a subset thereof, separately demodulate signals received by to mobile station 2. The demodulated signals from traffic demodulators 64A-64N are provided to combiner 66. Combiner 66 combines the demodulated data to provide an improved estimate of the received data.

Mobile station 2 measures the strength of received pilot signals. Control processor 62 provides acquisition parameters to search processor 56. In the exemplary embodiment of a CDMA communication system, control processor 62 provides a PN offset to search processor 56. In the exemplary embodiment, control processor 56 selects the PN offset hypothesis to test based on its set membership. Base stations 4 in the active set are tested the

most frequently. Base stations 4 in the candidate set are the second most frequently tested. Base stations 4 in the neighbor set are the third most frequently tested. And base stations 4 in the remaining set are tested the least frequently.

5        If the neighbor set contains extraneous members, which though in the physical proximity of base station 4A, are incapable of providing communications to mobile station 2, then the efficiency of the search operation will be degraded. Those base stations in the neighbor set that are most likely to be capable of providing communication to mobile station 2  
10       will be tested less frequently than if the neighbor set consisted only of base stations 4 capable of providing communications to mobile station 2. In addition, when a mobile station 2 is soft handoff the combination of all neighbor set base stations transmitted by each of the base stations in active communication with mobile station 2 may yield an unreasonably large  
15       combined neighbor set which may result in mobile station 2 trimming the set without sufficient information to accurately perform the trimming process.

Search processor 56 generates a PN sequence which is used by pilot demodulator 58 to demodulate the received signal. The demodulated pilot  
20       signal is provided to energy accumulator 60 which measures the energy of the demodulated pilot signal, by accumulating the energy for predetermined sequence length. The measured pilot energy values are provided to control processor 62. In the exemplary embodiment, control processor 62 compares the energy values to thresholds  $T_{ADD}$  and  $T_{DROP}$ .  $T_{ADD}$  is threshold above  
25       which the received signal is of sufficient strength to effectively provide communications with mobile station 2.  $T_{DROP}$  is a threshold value below which the received signal energy is insufficient to effectively provide communications with mobile station 2.

Mobile station 2 transmits a Pilot Strength Measurement Message  
30       which includes all pilots with energy greater than  $T_{ADD}$  and all members of the current active set who's measured pilot energy has not fallen below  $T_{DROP}$  for more than a predetermined time period. In the exemplary embodiment, mobile station 2 generates and transmits a Pilot Strength Measurement Message (PSMM) following the detection of a change in the  
35       strength of a pilot under the following three conditions:

1.       The strength of a neighbor Set or Remaining Set pilot is found above the threshold  $T_{ADD}$ .

2. The strength of a Candidate Set pilot exceeds the strength of an Active Set pilot by more than a threshold ( $T_{COMP}$ ).
3. The strength of a pilot in the Active Set has fallen  
5 below a threshold ( $T_{DROP}$ ) for greater than a predetermined time period.

In the exemplary embodiment, the Pilot Strength Measurement Message identifies the pilot and provides a corresponding measured pilot energy. In  
10 the exemplary embodiment, the base stations in the Pilot Strength Measurement Message are identified by their pilot offsets and their corresponding measured pilot energy is provided in units of decibels.

Control processor 62 provides the identities of the pilots and their corresponding measured pilot energies to message generator 70. Message  
15 generator 70 generates a Pilot Strength Measurement Message containing the information. The Pilot Strength Measurement Message is provided to transmitter (TMTR) 68, which encodes, modulates, upconverts and amplifies the message. The message is then transmitted through duplexer 52 and antenna 50.

Referring to FIG. 4, the Pilot Strength Measurement Message is received by antenna 30 of base station 4 and provided to receiver (RCVR) 28,  
20 which amplifies, down converts, demodulates and decodes the received signal and provides the message to base station controller interface 26. Base station controller interface 26 sends the message to base station controller (BSC) 6. The message is provided to selector 22, which may also receive the  
25 message redundantly from other base stations which are in communication with mobile station 2. Selector 22 combines message estimates received from the base stations in communication with mobile station 2 to provide an improved estimate of the received information. Selector 22 provides the  
30 pilot strength measurement message to hand-off control processor 20.

Handoff control processor 20 determines which base stations should be in active communication with mobile station 2 based on the available channel resources of base stations 4 and the information in the pilot strength measurement message. After determining the set of base stations 4  
35 that should be in active communication with mobile station 2, hand-off control processor 20 provides the information to selector 22 indicating the identities of the base stations to provide active communications to mobile station 2. In response to the set of base stations provided by hand-off control processor 20, selector 22 allocates traffic channels for performing

communications to mobile station 2. In addition, handoff control processor 20 provides the information provided in the pilot strength measurement message to PSMM database 21. In the exemplary embodiment, PSMM database 21 stores the PSMM data in magnetic format or optical format.

5 Hand-off control processor 20 provides a message indicating the set of base stations to message generator 24. Message generator 24 generates a message for transmission to mobile station 2, referred to as the handoff direction message. The handoff direction message indicates the base stations that will provide communications with mobile station 2 and corresponding  
10 traffic channels those base stations will use to communicate with mobile station 2. The message is provided through selector 22 and provided to the base stations which were in communication with mobile station 2 prior to the transmission of the pilot strength measurement message. The base stations in communication with mobile station 2 transmit the handoff  
15 direction message to mobile station 2.

Referring back to FIG. 3, the handoff direction message is received by antenna 50 of mobile station 2. It is provided to receiver 54, which amplifies, downconverts, demodulates and decodes the message and provides the handoff direction message to control processor 62. Control  
20 processor 62, then, configures the traffic channel demodulators 64A-64N to demodulate traffic channels in accordance with the base stations identified in the handoff direction message.

After a predetermined period of time or a predetermined number of pilot strength measurement messages have been received by base station 4A,  
25 report generator 23 prompts PSMM database 21 for the PSMM data. In the exemplary embodiment, report generator 23 sorts the information in the received pilot strength measurement messages according to the base station reported. Then, for each base station reported in a PSMM transmitted to base station 4A, report generator 23 computes the average energy reported,  
30 the maximum energy reported and the minimum energy reported. An exemplary report generated by report generator 23 is illustrated in FIG. 5.

Referring to FIG. 5, the data for each pilot strength measurement message reported to a base station with PN offset 224 (base station 4A) are presented. Along the horizontal axis the base station reported is identified  
35 by its PN offset (Sector PN). Looking at the information provided for base station (or sector) 224 three pieces of information 100A, 100B and 100C are provided. 100A is the mean reported pilot strength for base station with PN offset 224, 100B is the maximum reported pilot strength for that base station and 100C is the minimum reported strength for that base station.

In analyzing the data, the system designer first analyzes the reports for base station with PN offsets 220 and 296 (base stations 4L and 4M). These base stations have been received with insufficient power to provided reliable communications with mobile station 2. A first course of action with  
5 respect to these base stations is to determine whether they are identified in the neighbor list transmitted on the base station 4A's paging or traffic channel. If either of these base stations is identified in the neighbor list of base station 4A, it should be removed because of its inability to provide reliable communications to mobile station 2. As described earlier, this will  
10 make the search procedure for mobile stations in communication with the base station 4A more efficient. Referring back to FIG. 4, the system designer, based on the report generated by report generator 23, would determine the membership of a revised neighbor list. This neighbor set would then be input to neighbor list message generator 31. The neighbor list message is  
15 then provided to transmitter 32 which transmits the neighbor list to mobile station 2 on the traffic or paging channel.

Reducing the members of the neighbor list has the effect of allowing the mobile station to search the true neighbors at a faster rate which improves system performance. Also, sometime the mobile station will  
20 report pilots that were not in the neighbor list but it found as part of the remainder set in some cases therefore PSMM's will help add pilots to the neighbor list not just delete some.

The ultimate goal beside neighbor list tuning is really to optimize the spatial isolation as much as possible between base stations, i.e. limit as much  
25 as feasible the interference from base stations that are far away, e.g. if the number of pilot PN's reported for a given reference pilot is very large that means that base stations which are 2 rings or maybe even 3 rings out are generating interference. In most cases these base stations do not provide coverage in these areas just low level interference which reduces the  
30 capacity of a given sector.

Thus, a second course of action in the supplementary configuration of the network is to determine whether action should be taken with respect to the base stations 4L and 4M. Base stations in a CDMA communication systems operate on the same frequency band. The operation of a cellular  
35 communication system depends on spatial isolation of the cell coverage areas. In a CDMA system, some coverage overlap is desirable because this enables a mobile station to be placed into a soft handoff when it is located near cell boundaries. However, the signals which is spilling over from the base stations 4L and 4M are not providing a useful communications to

mobile stations, and in addition are serving as a source of in band interference to communications from base station 4A. The network may be further optimized by reducing the amount of spillover from base stations 4L and 4M.

5           A preferred method for reducing the undesirable spill over from base stations 4L and 4M is to down tilt their antennas which will restricts the RF emanations to their desired cell coverage area. Alternative methods for reducing the spill over include moving the base station to an different location. For example, if the base station is located on top of a six story  
10 building, the spill over can be reduced by moving the base station to a lower position. Additional procedures that can be used to reduce undesirable spillover include, changing the total transmit power of the base station or adjusting the base station's azimuth angle. These steps can be taken based on the report generated to optimize the amount of spatial isolation of the  
15 coverage areas of the base stations in a cellular network.

In addition, the information collected in the pilot strength measurement messages can be fed back into the simulation programs. This provides improved simulation of the cellular network and will also result in improved generation of variable parameter values.

20           The previous description of the preferred embodiments is provided to enable any person skilled in the art to make or use the present invention. The various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without the use of the inventive faculty.  
25 Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

**I CLAIM:**

## CLAIMS

1. A method for optimizing network configuration comprising
- 2 the steps of:
  - setting a set of parameters of a cellular network;
  - 4 operating said cellular network for a predetermined interval;
  - collecting and saving data from received pilot strength measurement
  - 6 messages during said predetermined interval; and
  - revising said set of parameters in accordance with said data from
  - 8 received pilot strength measurement messages.

Approved for Release



A method and apparatus for optimizing system parameters in a cellular communication network. Pilot strength measurement messages (PSMMs) that are received by bases stations of the network to be optimized are saved in a database. The database accumulates the raw data contained in the pilot strength measurement messages. After a sufficient amount of data has been collected, a report generator compiles a statistics report for each base station based on the raw PSMM data. The present invention then provides a method for applying the information in the report in order to optimize the network parameters of the cellular system. The neighbor list which is transmitted on the paging or traffic channel is revised in accordance with the compiled statistics. The antenna tilt of the base stations is adjusted in accordance with the compiled statistics.

A hexagonal grid map consisting of 19 cells arranged in a larger hexagonal shape. The cells are labeled as follows:

- 4A: Contains a vehicle icon labeled C2.
- 4B: Empty.
- 4C: Contains a small triangle icon.
- 4D: Contains a small triangle icon.
- 4E: Contains a small triangle icon.
- 4F: Contains a small triangle icon.
- 4G: Contains a small triangle icon.
- 4H: Contains a small triangle icon.
- 4I: Contains a small triangle icon.
- 4J: Contains a small triangle icon.
- 4K: Contains a small triangle icon.
- 4L: Contains a small triangle icon.
- 4M: Contains a small triangle icon.
- 4N: Contains a small triangle icon.
- 4O: Contains a small triangle icon.
- 4P: Contains a small triangle icon.
- 4Q: Contains a small triangle icon.
- 4R: Contains a small triangle icon.
- 4S: Contains a small triangle icon.
- 4T: Contains a small triangle icon.
- 4U: Contains a small triangle icon.
- 4V: Empty.

FIG. 1

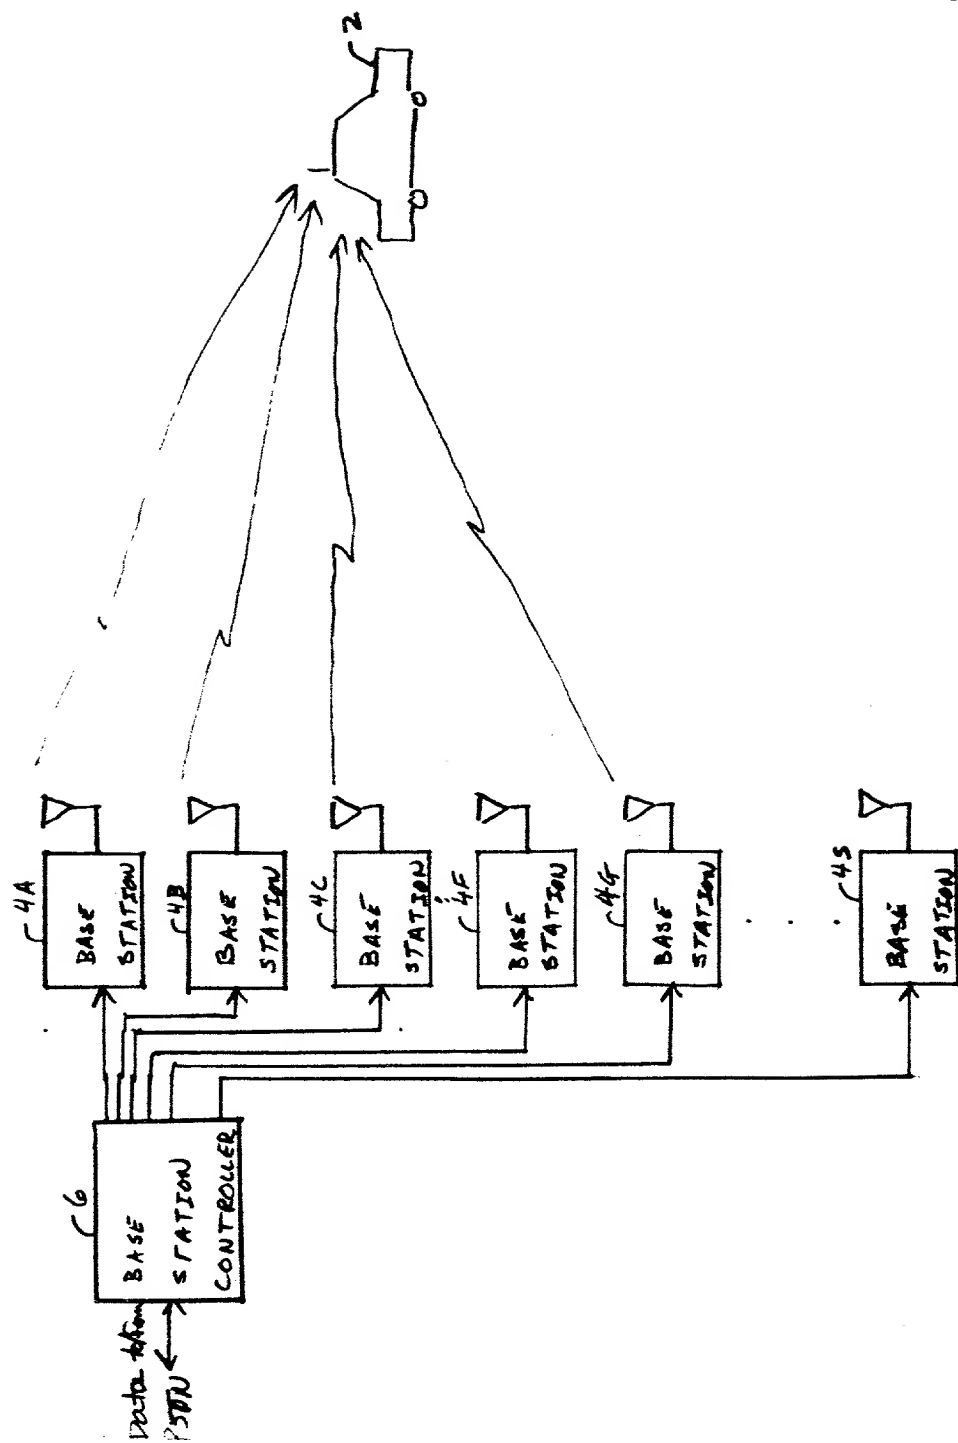


FIG. 2

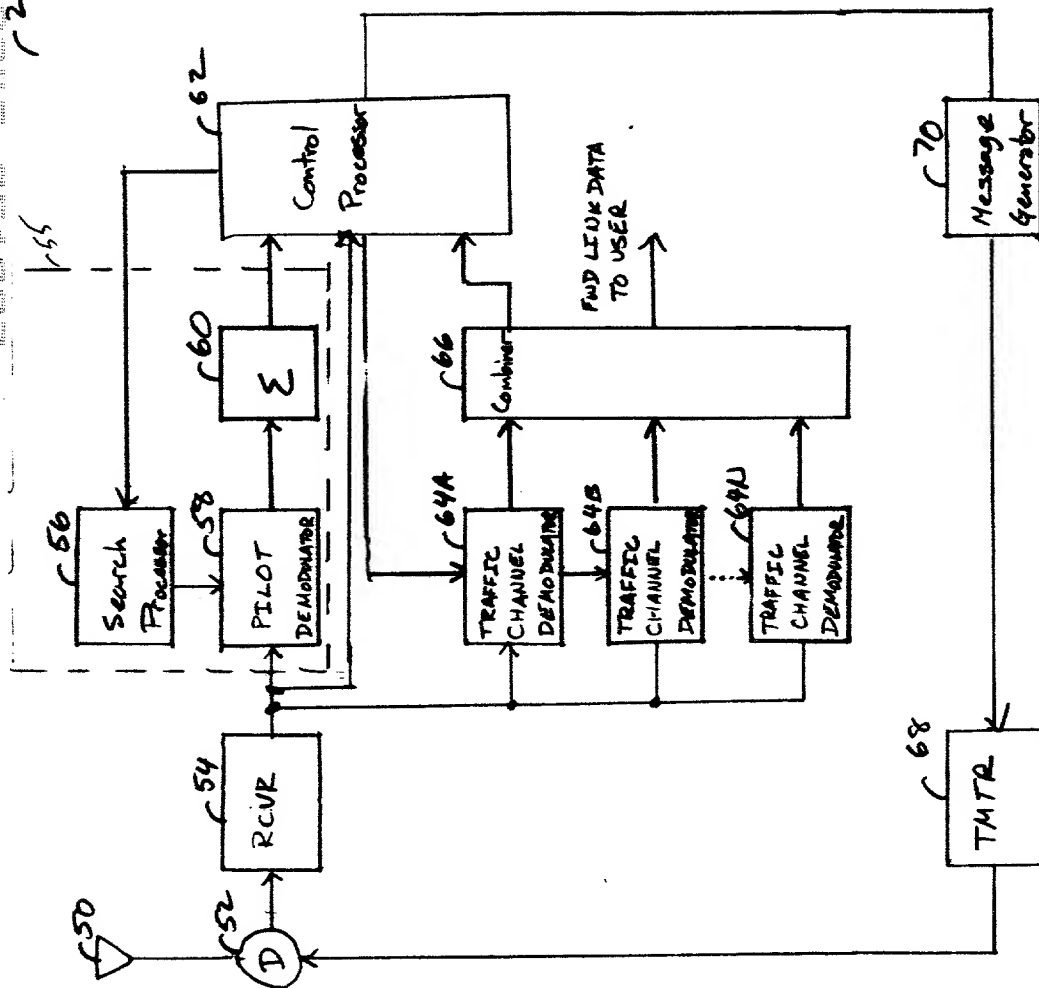


FIG. 3

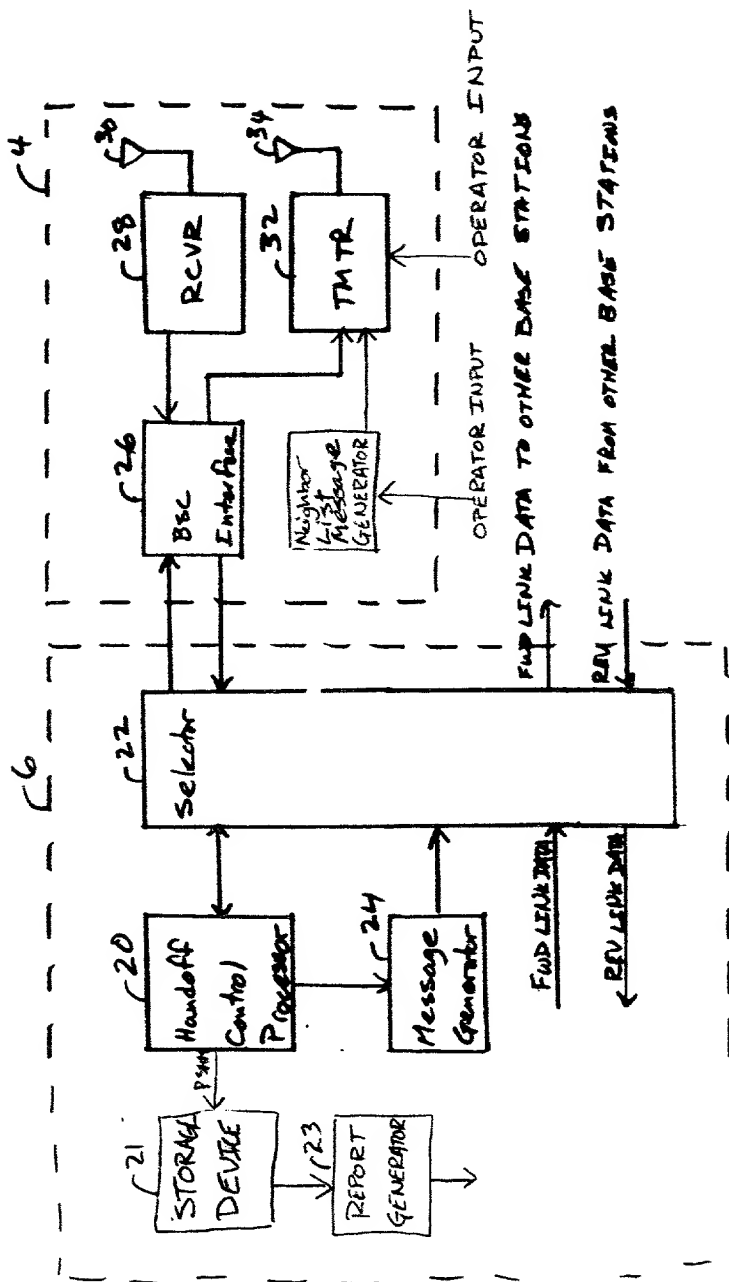


FIG. 4

## Reference Sector 224

[illegible]

# COMBINED DECLARATION / POWER OF ATTORNEY

ATTORNEY DOCKET NO.: QCPA418

AS BELOW NAMED INVENTOR, I HEREBY DECLARE THAT: This Declaration is of the following type:

☒ Original
 ☐ Supplemental
 ☐ Continuation-In-Part
 ☐ Divisional  
☐ Continuation
 ☐ National Stage of PCT

My residence, post office address and citizenship are as stated below next to my name: I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **METHOD AND APPARATUS FOR OPTIMIZATION OF A CELLULAR NETWORK** the specification of which:

☒ is attached hereto.  
☐ was filed on \_\_\_\_\_ as Serial No. \_\_\_\_\_  
☐ was amended on \_\_\_\_\_ (if applicable).  
☐ was described and claimed in PCT International Application No. \_\_\_\_\_ filed on \_\_\_\_\_  
 and as amended under PCT Article 19 on \_\_\_\_\_

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the examination of the this application in accordance with Title 37, Code of Federal Regulations, Sec. 1.56(a).

I hereby claim foreign priority benefits under Title 35, United states Code, Sec. 119 of any foreign application(s) for patent or inventor's certificate or of any PCT International application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT International application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

Priority Claimed

_____ (Country)	_____ (Application No.)	_____ (Day/Month/Year/Filed)	_____ (Yes)	_____ (No)
_____ (Country)	_____ (Application No.)	_____ (Day/Month/Year/Filed)	_____ (Yes)	_____ (No)

I hereby claim the benefit under Title 35 USC 120 of the United States application(s) listed below, and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 USC 112, I acknowledge the duty to disclose material information as defined in Title 37 CFR 1.56(a) which occurred between the filing date of the prior application and the national or PCT International filing date of this application:

_____ (Serial No.)	_____ (Filing Date)	_____ (Status)
_____ (Serial No.)	_____ (Filing Date)	_____ (Status)

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith: Russell B. Miller, Reg. No. 31,122, Gregory D. Ogrod, Reg. No. 30,880, Brian S. Edmonston Reg. No. 38,864, Roger W. Martin, Reg. No. 39,291, Linli L. Golden, Reg. No. P40,622, Truong T. Dinh, Reg. No. P40,993, and/or Sean English, Reg. 37,319. Please direct all telephone calls to Russell B. Miller at (619) 658-4833 and address all correspondence to: Russell B. Miller, QUALCOMM Incorporated, 6455 Lusk Boulevard, San Diego, California 92121-2779.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor <b>Roberto Padovani</b>	Inventor Signature <b>FILED UNSIGNED</b>	Date
Residence 13593 Penfield Point, San Diego, California 92130	Citizenship <b>Italy</b>	
Post Office Address 13593 Penfield Point, San Diego, California 92130		

QUALCOMM Incorporated  
 6455 Lusk Boulevard  
 San Diego, California 92121-2779  
 Telephone: (619) 658-4828  
 Facsimile: (619) 658-2502